

OPTIONS

Methods of installation

• embedded in concrete

Bollard handle


- ∘ none
- 1 chain (both sides)
- 1 chain (one side)
- attachment of 2 chains (double-sided)
- attachment of 2 chains (final)

Fence mounts

- single sided
- double sided
- ∘ none

DESCRIPTION

Massive, static bollards are made of three **iron castings** and two pipes (fi 11.4 and fi16). There is a possibility to install special **bollard chains**. They are remarkable to separate public places, such as: squares, fountaines or monuments.

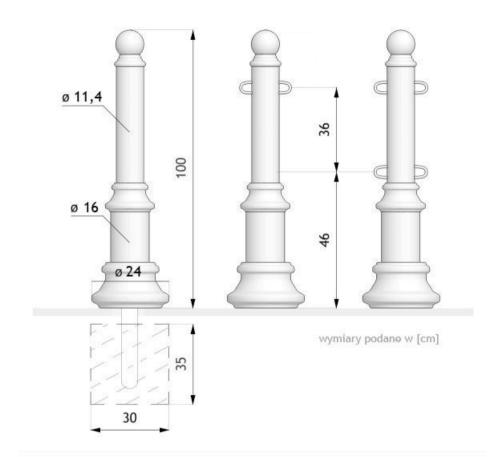

GENERAL TECHNICAL DATA

Dimensions

- height from ground surface: 100 cm

- height with anchoring section: 135 cm

Materials

- cast iron
- steel tubes




In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Official Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright , Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Mirosław Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Mirosław Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.

INSTALLATION DIAGRAMS (E, F, G) FOR MOUNTING ON THE FOUNDATION

NOTE: The drawings do not reflect the actual dimensions of the foundation. They are only exemplary assembly schemes taking into account the type of anchoring and the substrate material to which the furniture is to be fixed.

G


The size of the foundation depends on the local foundation conditions.



INSTALLATION INTO PAVING WITH FOUNDATION

Description of the assembly

- 1. ZANO product
- 2. Stone paving / concrete paving / stone slabs / concrete slabs
- **3.** Sand ballast (approx. 2 4 cm)
- **4.** Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 5. Ground



MOUNTING TO CONCRETE FOUNDATION

Description of the assembly

- 1. ZANO product
- Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 3. Ground

MOUNTING TO CONCRETE FOUNDATION

3

2

Description of the assembly

- 1. ZANO product
- 2. Fixed hardened surface e.g. concrete or asphalt
- **3.** Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- **4.** Stone aggregate substructure
- 5. Sand ballast (approx. 2 4 cm)
- 6. Ground