

OPTIONS

Methods of installation

• attached by bolts to foundation

Container


• galvanized steel container

DESCRIPTION

The Simple litter bin is a popular urban waste bin available in many variants, with or without built-in ashtrays, in various capacities and in a version for segregated waste with separate waste compartments. Model 03.261 is a single-chamber version, enlarged with a container capacity of approximately 100 litres.

It is a large outdoor municipal waste bin made of stainless steel, or optionally painted carbon steel with a container in stainless steel. The inner liner is made of galvanised steel.



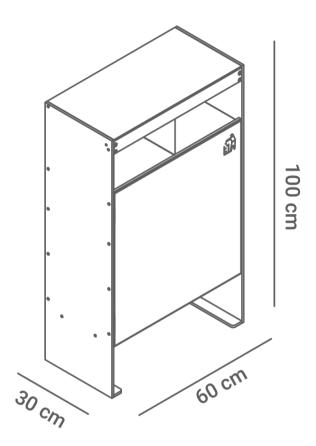

GENERAL TECHNICAL DATA

Dimensions

- width: 60 cm
- height: 100 cm
- depth: 30 cm

Capacity

- capacity: 60 l

Materials

- construction stainless steel or carbon steel
- container stainless steel
- insert galvanised sheet metal


ZANO


In accordance with the Polish Law on Copyright and Related Rights of 04.02.1994 (Offcial Journal of Laws No. 24, item 83, corrected: Journal of Laws No. 43, item 170) and in accordance with the EU copyright legislation including all EU directives and regulations on copyright, Zano Mirosław Zarotynski Company, reserves the copyright of drawings, descriptions, 3D models, renderings, graphics, content contained in offers, attachments to offers and all other documents. Its content is the intellectual property of ZANO Miroslaw Zarotinski company. The use of author's ideas, solutions, copying, distribution of photos, graphics or fragments of graphics, descriptive texts, for profit, without the permission of the author - ZANO Miroslaw Zarotynski company - is prohibited and constitutes a copyright infringement and is punishable.


MOUNTING DIAGRAMS (A, B, C, D) FOR SCREW MOUNTING


NOTE: The drawings do not reflect the actual dimensions of the foundation. They are only exemplary assembly schemes taking into account the type of anchoring and the substrate material to which the furniture is to be fixed.

The size of the foundation depends on the local foundation conditions.

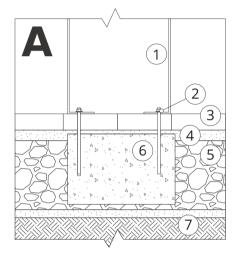

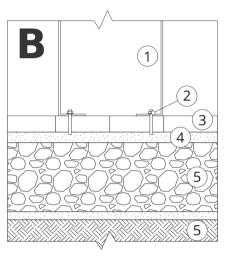

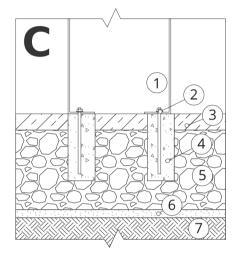

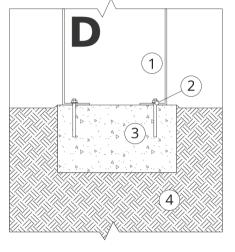

INSTALLATION INTO PAVING WITH FOUNDATION

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- 3. Stone paving / concrete paving / stone slabs / concrete slabs
- 4. Sand ballast (approx. 2 4 cm)
- 5. Stone aggregate substructure
- **6.** Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 7. Ground

INSTALLATION TO PAVING

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- **3.** Stone paving / concrete paving / stone slabs / concrete slabs
- 4. Sand ballast (approx. 2 4 cm)
- 5. Stone aggregate substructure
- 6. Ground

CONCRETE / ASPHALT MOUNTING

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- **3.** Fixed hardened surface e.g. concrete or asphalt
- Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 5. Stone aggregate substructure
- 6. Sand ballast (approx. 2 4 cm)
- 7. Ground

MOUNTING TO CONCRETE FOUNDATION

Description of the assembly

- 1. ZANO product
- 2. Quick-action fastener or chemical anchor
- **3.** Concrete foundation, class C16/20 (top surface concrete 10 cm below paving surface)
- 4. Ground